


FIRMAHOLD Collated Brad Nails

Ideal for internal applications such as skirting, architrave, tongue and groove fixing, with a T head. Also available in stainless steel for hardwood applications.

- Available in straight or 20° collation angle
- T Head to give concealed fixings
- Shank Design: Low penetration resistance into all materials

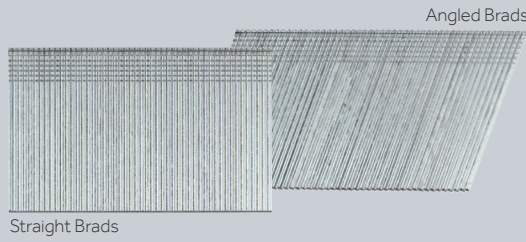

Second Fix Applications



Straight Brads

Gauge	Length (mm)	Nails Per Strip	Collation Angle
Galvanised			
16	19	50	Straight
16	25	50	Straight
16	32	50	Straight
16	38	50	Straight
16	45	50	Straight
16	50	50	Straight
16	64	50	Straight
18	16	100	Straight
18	19	100	Straight
18	25	100	Straight
18	32	100	Straight
18	38	100	Straight
18	45	100	Straight
18	50	100	Straight

A2 Stainless Steel			
16	25	50	Straight
16	38	50	Straight
16	50	50	Straight
16	64	50	Straight
18	19	100	Straight
18	25	100	Straight
18	32	100	Straight
18	38	100	Straight
18	50	100	Straight



With Fuel Cells

Product Code	Fuel Cell Qty	Pack Qty (pcs)	Carton Qty (packs)
BG1619G	2	2,000	10
BG1625G	2	2,000	10
BG1632G	2	2,000	10
BG1638G	2	2,000	10
BG1645G	2	2,000	10
BG1650G	2	2,000	10
BG1664G	2	2,000	10
TYPE - FRT			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
SUB TYPE - FRT02			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

BSS1625G	2	2,000	10
BSS1638G	2	2,000	10
BSS1650G	2	2,000	10
BSS1664G	2	2,000	10
TYPE - FRT			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
SUB TYPE - FRT02			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-



No Fuel Cells

Product Code	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BG1619	2,000	12	768
BG1625	2,000	12	576
BG1632	2,000	12	576
BG1638	2,000	12	576
BG1645	2,000	12	576
BG1650	2,000	12	576
BG1664	2,000	12	576
TYPE - FRT			
BG1816	5,000	20	1080
BG1819	5,000	20	1080
BG1825	5,000	20	1080
BG1832	5,000	12	648
BG1838	5,000	12	648
BG1845	5,000	12	648
BG1850	5,000	12	648
SUB TYPE - FRT02			
BG1816	5,000	20	1080
BG1819	5,000	20	1080
BG1825	5,000	20	1080
BG1832	5,000	12	648
BG1838	5,000	12	648
BG1845	5,000	12	648
BG1850	5,000	12	648
TYPE - FRT			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
SUB TYPE - FRT02			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

BSS1625	2,000	12	768
BSS1638	2,000	12	576
BSS1650	2,000	12	576
BSS1664	2,000	12	768
TYPE - FRT			
BSS1819	5,000	20	1,280
BSS1825	5,000	20	1,280
BSS1832	5,000	12	648
BSS1838	5,000	12	648
BSS1850	5,000	12	648
SUB TYPE - FRT02			
BSS1819	5,000	20	1,280
BSS1825	5,000	20	1,280
BSS1832	5,000	12	648
BSS1838	5,000	12	648
BSS1850	5,000	12	648
TYPE - FRT			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
SUB TYPE - FRT02			
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-



Angled Brads

Gauge	Length (mm)	Nails Per Strip	Collation Angle
Galvanised			
16	32	50	20°
16	38	50	20°
16	45	50	20°
16	50	50	20°
16	64	50	20°

A2 Stainless Steel			
16	38	50	20°
16	50	50	20°
16	64	50	20°



With Fuel Cells

Product Code	Fuel Cell Qty	Pack Qty (pcs)	Carton Qty (packs)
ABG1632G	2	2,000	10
ABG1638G	2	2,000	10
ABG1645G	2	2,000	10
ABG1650G	2	2,000	10
ABG1664G	2	2,000	10
TYPE - FRT			
-	-	-	-
SUB TYPE - FRT02			
-	-	-	-

ABSS1638G	2	2,000	10
ABSS1650G	2	2,000	10
ABSS1664G	2	2,000	10
TYPE - FRT			
-	-	-	-
SUB TYPE - FRT02			
-	-	-	-



No Fuel Cells

Product Code	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
ABG1632	2,000	6	396
ABG1638	2,000	6	396
ABG1645	2,000	6	396
ABG1650	2,000	6	396
ABG1664	2,000	6	396
TYPE - FRT			
-	-	-	-
SUB TYPE - FRT02			
-	-	-	-

ABSS1638	2,000	6	396
ABSS1650	2,000	6	396
ABSS1664	2,000	6	396
TYPE - FRT			
-	-	-	-
SUB TYPE - FRT02			
-	-	-	-